


GM8012 + GM83004 Large Active Area Optical Power Meter

Technical Specifications V1.00
May, 2011

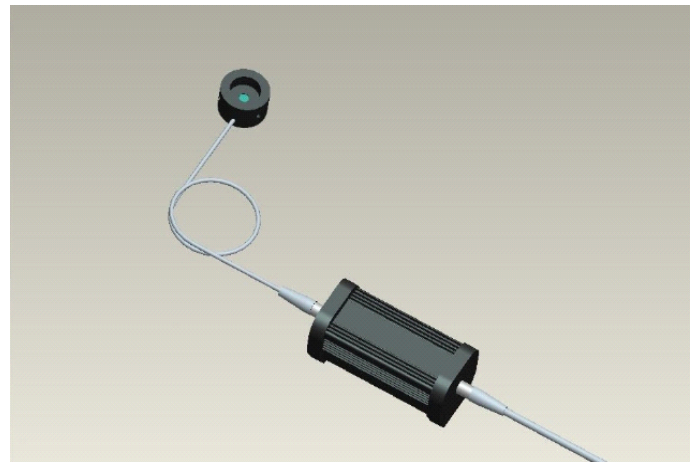

GM8012 + GM83004 Large Active Area Optical Power Meter

The GM8012 + GM83004 large active area optical power meter offer superior performance for the test of DWDM components, AWG , WSS, OPM, PLC components, optical amplifiers, and other general purpose of fiber optical test and measurement applications. With the large PD active area and special small separate PD heard design, it is very good to use in the optical path ajustment. It is special design for volume production line application.

GM8012 + GM830042 large active area optical power meter is a High Performance, Small Dimension, Fast Startup, Affordable Optical Power Meter test system. It provides low power, high power, single channel and dual channel optical power meter modules options. UC Instruments also can provide high channel count solution up to 16 channels.

Features

- High performance
- Quick startup
- Difference power range and difference channel number available
- Small dimension
- Affordable price

Applications

- WSS, OPM optical path ajustment
- WDM, AWG, PLC components Insertion Loss, Return Loss test
- Fiber Sensor , Fiber Cable test
- PMD and PDL measurement
- Fiber Optical , Telcom R & D lab test

Specifications

Model #	GM8012 + GM83004	GM8012 + 2 X GM83004
<i>Sensor Element</i>	Single Channel InGaAs	Dual Channel InGaAs
<i>Wavelength Range</i>	850 ~ 1700 nm	
<i>PD Active Area</i>	3.0 mm X 4.0 mm	
<i>Power Range</i>	+ 3 ~ -65 dBm	
<i>Application Fiber Type</i>	Standard SM and MM up to 62.5 um core size	
<i>Uncertainty (accuracy) at reference condition</i>	+/- 4% (1200 nm ~ 1610 nm)	
<i>Relative Uncertainty (accuracy) at reference condition</i>	< 0.02 dB Typical	
<i>Linearity (power)</i>	<= +/- 0.06 dB (1200 nm ~ 1610 nm, + 0 ~ -60 dBm)	
<i>Return Loss</i>	> 40 dB	
<i>Operation Temperature</i>	0 ~ +40°C	
<i>Storage Temperature</i>	-30 ~ +80°C	
<i>Recalibration Period</i>	2 years	
<i>Dimensions</i>	200 mm W, 105 mm H, 250 mm D	
<i>Weight</i>	4.5 kg	

Model #	GM8012 + GM83005	GM8012 + 2 X GM83005
<i>Sensor Element</i>	Single Channel InGaAs	Dual Channel InGaAs
<i>Wavelength Range</i>	850 ~ 1700 nm	
<i>PD Active Area</i>	3.0 mm X 4.0 mm	
<i>Power Range</i>	+ 13 ~ -50 dBm	
<i>Application Fiber Type</i>	Standard SM and MM up to 62.5 um core size	
<i>Uncertainty (accuracy) at reference condition</i>	+/- 4% (1200 nm ~ 1610 nm)	
<i>Relative Uncertainty (accuracy) at reference condition</i>	< 0.02 dB Typical	
<i>Linearity (power)</i>	<= +/- 0.06 dB (1200 nm ~ 1610 nm, +20 ~ -40 dBm)	
<i>Return Loss</i>	> 40 dB	
<i>Operation Temperature</i>	0 ~ +40°C	
<i>Storage Temperature</i>	-30 ~ +80°C	
<i>Recalibration Period</i>	2 years	
<i>Dimensions</i>	200 mm W, 105 mm H, 250 mm D	

<i>Weight</i>	<i>4.5 kg</i>
---------------	---------------

Customers can contact with UC INSTRUMENTS customers services to get detail GM8001 Lightwave Multimeter specification.

UC INSTRUMENTS' Test and Measurement Support, Services and Assistance

UC INSTRUMENTS provides high performance, high value, low cost, affordable test and measurement instruments solution for our customers. Our extensive support sources can help you choose right UC INSTRUMENTS' products for your application and apply them successfully. Every instruments and system we sell a global warranty. All of our instruments with at least 18 months factory warranty.

Our Promise

All of UC INSTRUMENTS' test and measurement instruments and system will met its advertised performance and functionality. When you select UC INSTRUMENTS' products, we can verify if it is work properly, help with products operation, and provides the basic measurement assistance for the use of special capabilities.

Contact Information

United States:

UC INSTRUMENTS CORP.

37498 Glenmoor Dr.

Fremont, CA 94536

USA

Tel: 1-510-366-7353

Fax: 1-510-795-1795

www.ucinstruments.com

Product specifications and descriptions in this documentation subject to change without notice.

Copyright @ 2008 UC INSTRUMENTS CORP.

May, 2010

31000043 V1.00